



V1.2

--
--
--

KE-GT(50-60)KTL4





1

1.1

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪


▪

▪




-
-
-

1.2

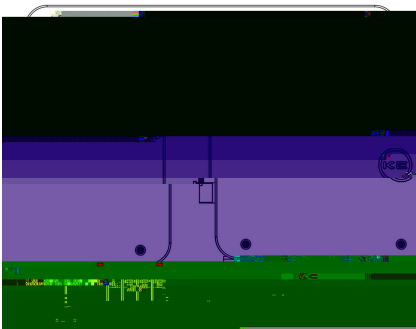

1.3

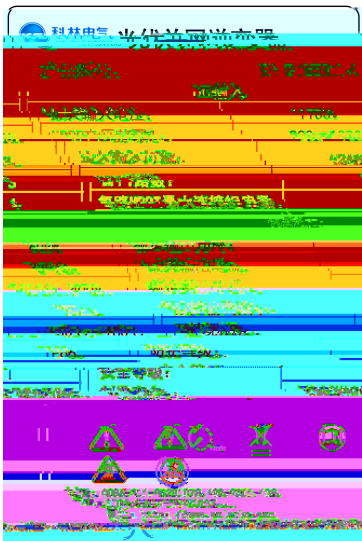

1.4

[illegible]



2



2.1






2.2



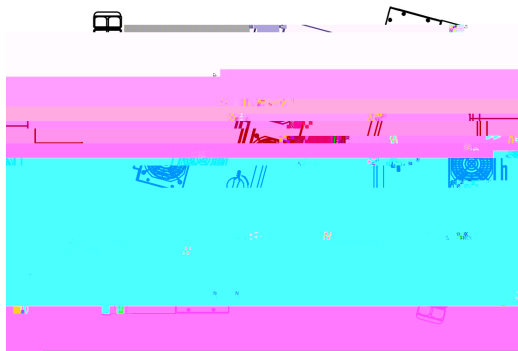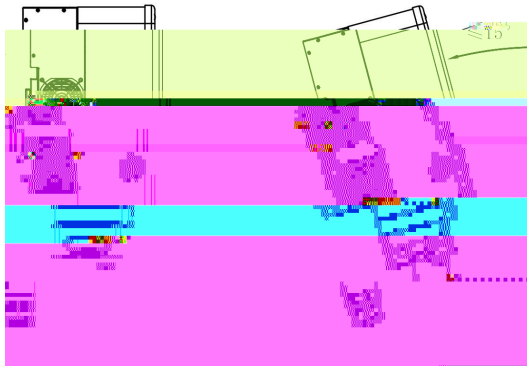







2.4



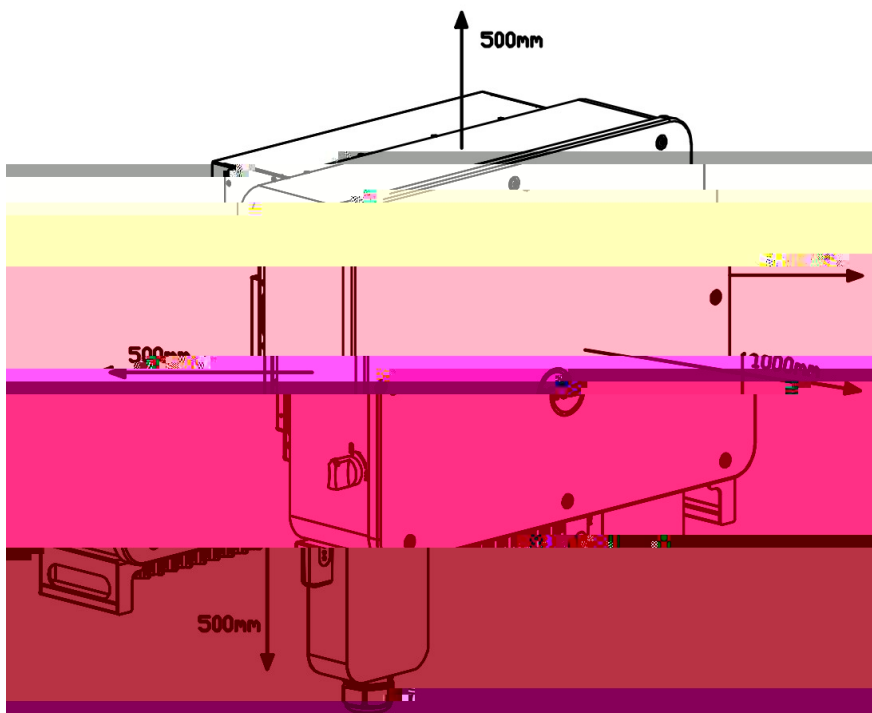





2.5

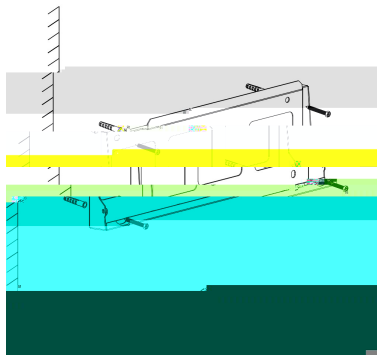
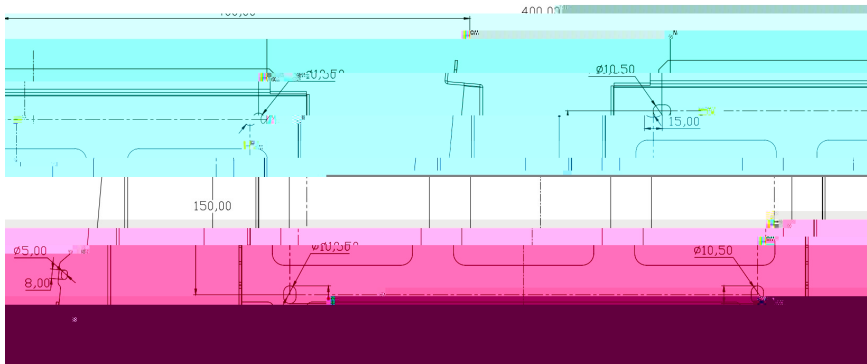


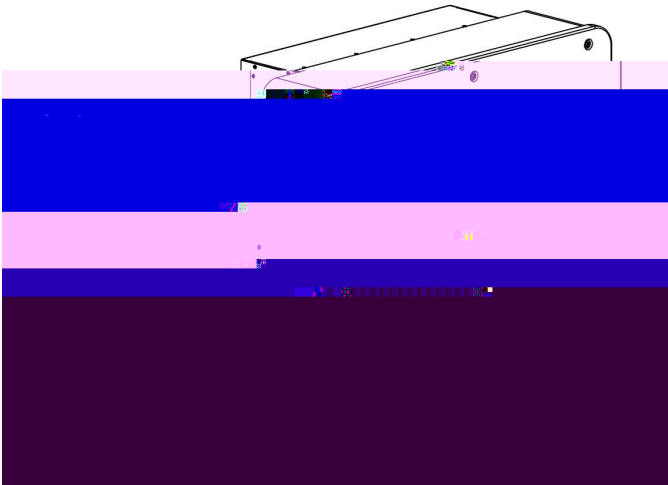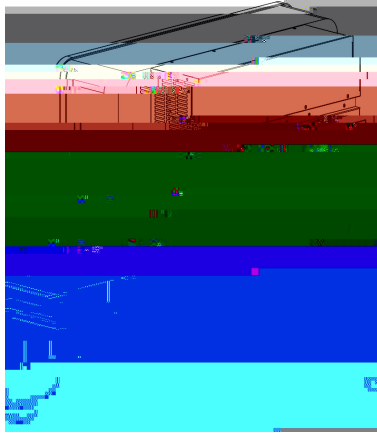

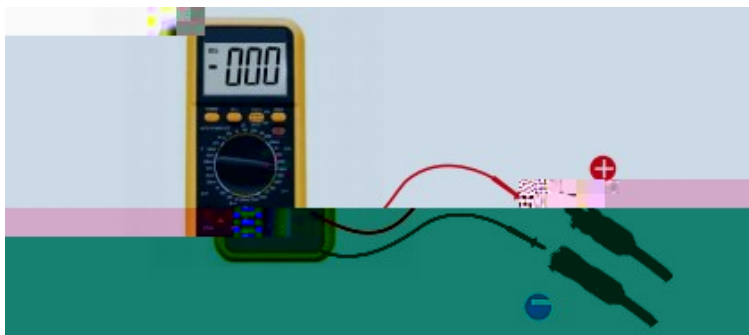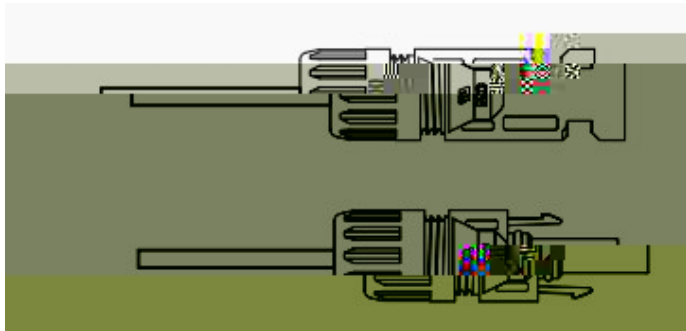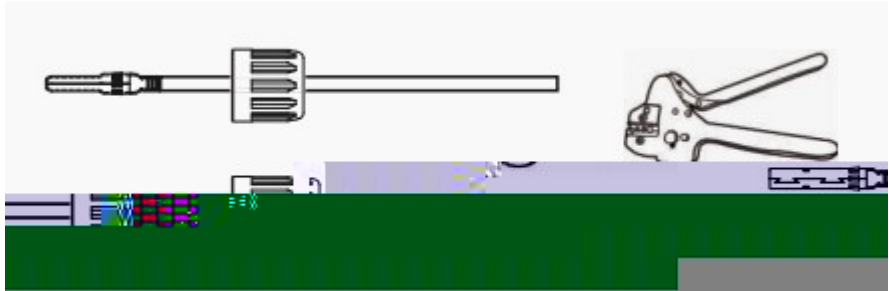

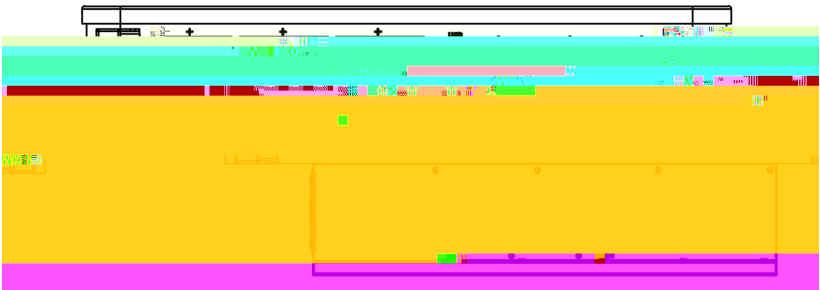

3.3

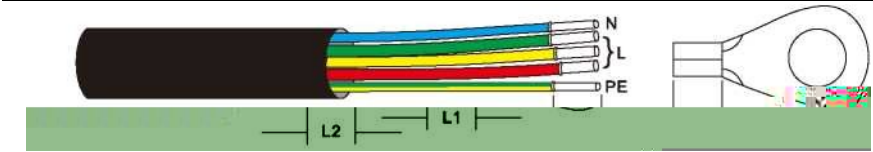


3.5



重要:

对于并联的多个逆变器，所有逆变器应连接到同一接地点，以确保接地线等电位连接。

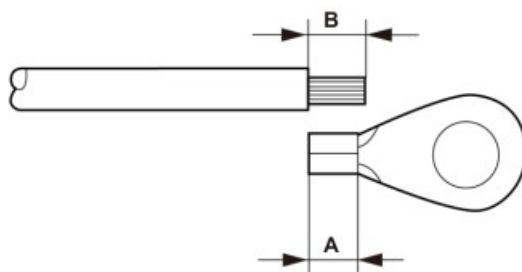


(OT线缆端子压接区域) 长2mm~3mm。




重要:

B (绝缘剥离长度) 比

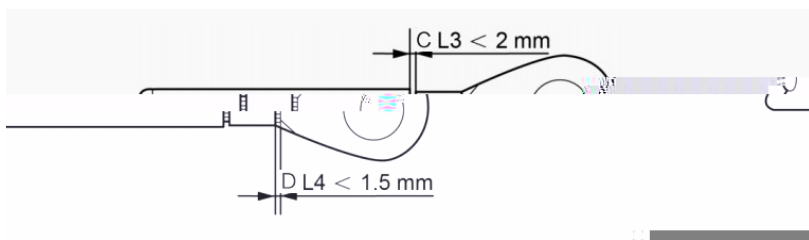

重要:

将端子压接到线缆后，检查连接以确保端子牢固地压接到线缆上。

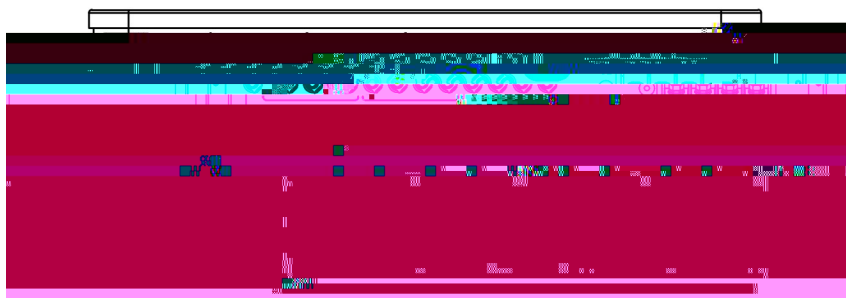

重要:

为提升耐磨性能，安装时请确保端子与线缆充分接触。






4

4.1

5

5.1

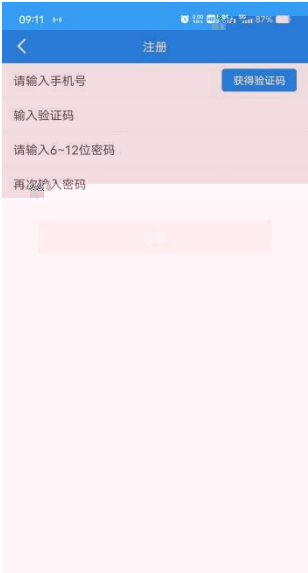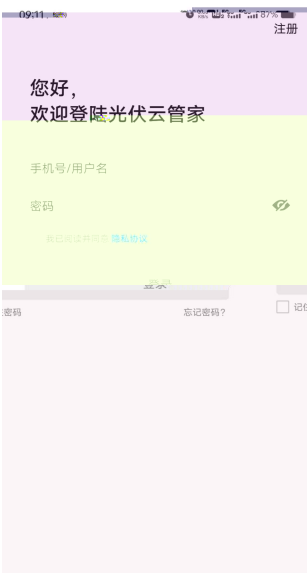

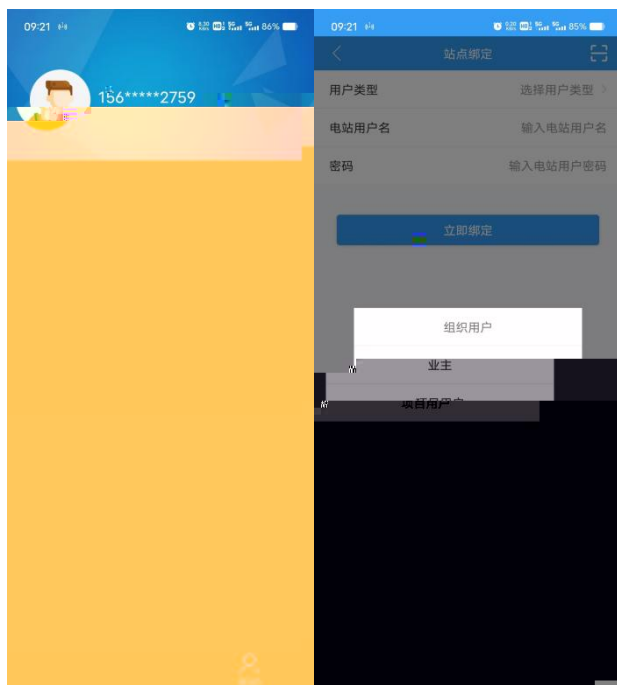

5.2

智慧光伏监控运维系统





